



- Up to 255 devices in LAN network
- Door opening
- Easy installation with PoE LAN network
- Support Central Guard Unit
- Intercommunication between Departments and Guard unit
- Intercommunication between Departments

Elegant and sturdy design in line with new trends, night vision, and high definition. For IP Video systems of up to 255 devices. Easy to use and with outstanding quality.

VSP 7027IP

IP VIDEO INTERCOM MONITOR

Monitor screen: 7" IPS TFT
Display resolution: 1024*600
Wire type: Red LAN Cat-5e or Cat-6
LAN Interface: 10/100 Ethernet (RJ-45)
Power source: PoE (IEEE 802.3af Class 0)
Dimension: 161(H)×174(W)×22(D)mm
Operating temperature: -10°C / +50°C
Wiring distance: 100 mts
Hands-free
OSD Menu
Volume selector
Easy installation
Door lock control
Ultra slim / wall mount
Intercom function
Brightness and Contrast
Ringtone selection
Call log
Divert Calls to SmartPhone
Wi-Fi connection
IP camera display

VSP 7081IP

IP GUARD UNIT

Monitor screen: 7" digital TFT
Display resolution: 800*480
Wire type: Red LAN Cat-5e or Cat-6
LAN Interface: 10/100 Ethernet (RJ-45)
Power source: PoE (IEEE 802.3af Class 0)
Dimension: 193(H)×235(W)×55(D)mm
Operating temperature: -10°C / +50°C
Wiring distance: 100 mts
Hands-free
OSD Menu
Volume selector
Easy installation
Door lock control
Ultra slim / wall mount or desk
Intercom function
Brightness and Contrast
Ringtone selection
Call log
Divert Calls to SmartPhone
IP camera display

VSP 7098IP

DOOR STATION

Weather resistant
 Wire type: Red LAN Cat-5e or Cat-6
 LAN Interface: 10/100 Ethernet (RJ-45)
 Power source: PoE (IEEE 802.3af Class 0)
 Screen: Touch TFT (5mm tempered glass)
 Display resolution: 800*480
 Access by Password and RFID Card
 Dimension: 281 x 110 x 44 mm
 Operating temperature: -10° C / +50° C
 List of Departments on screen
 Door opening time configuration
 Surface Mount
 Connection with: Locks and EM Locks
 Wiring distance: 100 mts
 Material: Stainless steel front panel
 Anti-Fingerprint Display
 Protection: IP 65

CAMERA

Sensor: 1/3.7"
 ISP with 77dB WDR
 170° Wide Angle 720p Fisheye Camera
 Minimum lighting: 5 Lux
 Night Illumination: Built-in infrared illuminators

VSP 7001IP

DOOR STATION 1 BUTTON

Weather resistant
 Wire type: Red LAN Cat-5e or Cat-6
 LAN Interface: 10/ 100 Ethernet (RJ-45)
 Power source: PoE (IEEE 802.3af Class 0)
 Dimension: 179 x 94 x 42 mm
 Operating temperature: -10° C / +50° C
 Surface Mount
 Connection with: Locks and EM Locks
 Wiring distance: 100 mts
 Material: Aluminum Case
 Protection: IP 65


CAMERA

Sensor: 1/3.7"
 ISP with 77dB WDR
 170° Wide Angle 720p Fisheye Camera
 Minimum lighting: 5 Lux
 Night Illumination: Built-in infrared illuminators

BPS 710

POWER SUPPLY

Power source: 110VAC / 220VAC
 Output Voltage: 24VDC / 1.5A
 Overcharge and overvoltage protection
 Operating temperature: -10° C / +50° C
 DIN Rail Mount
 Used to power monitor with WiFi connection

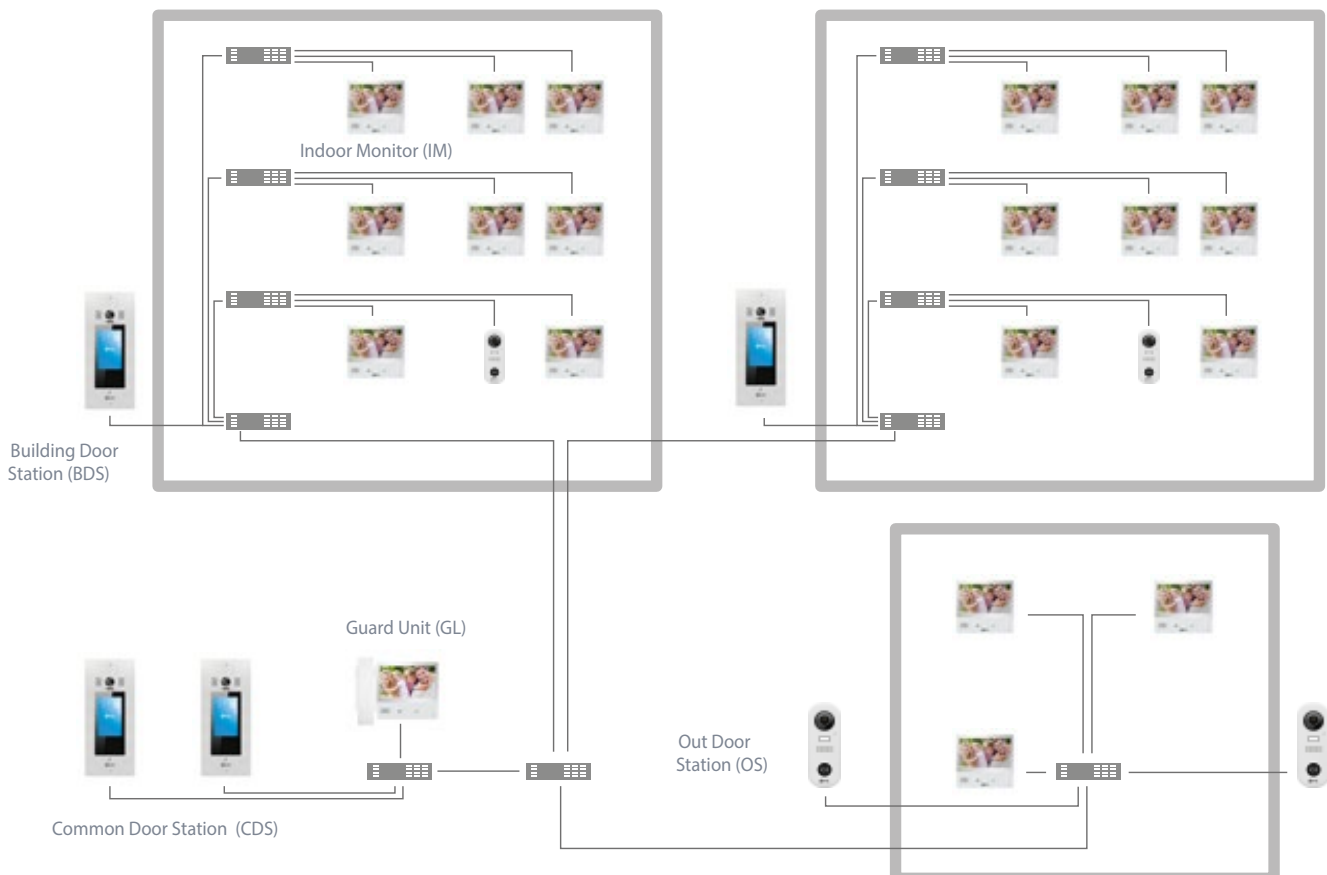



VSP 7089IP



VSP 7027IP



VSP 7001IP



VSP 7081IP



BPS 710